


APPLICATION NOTE

DV GEN II Modbus protocol

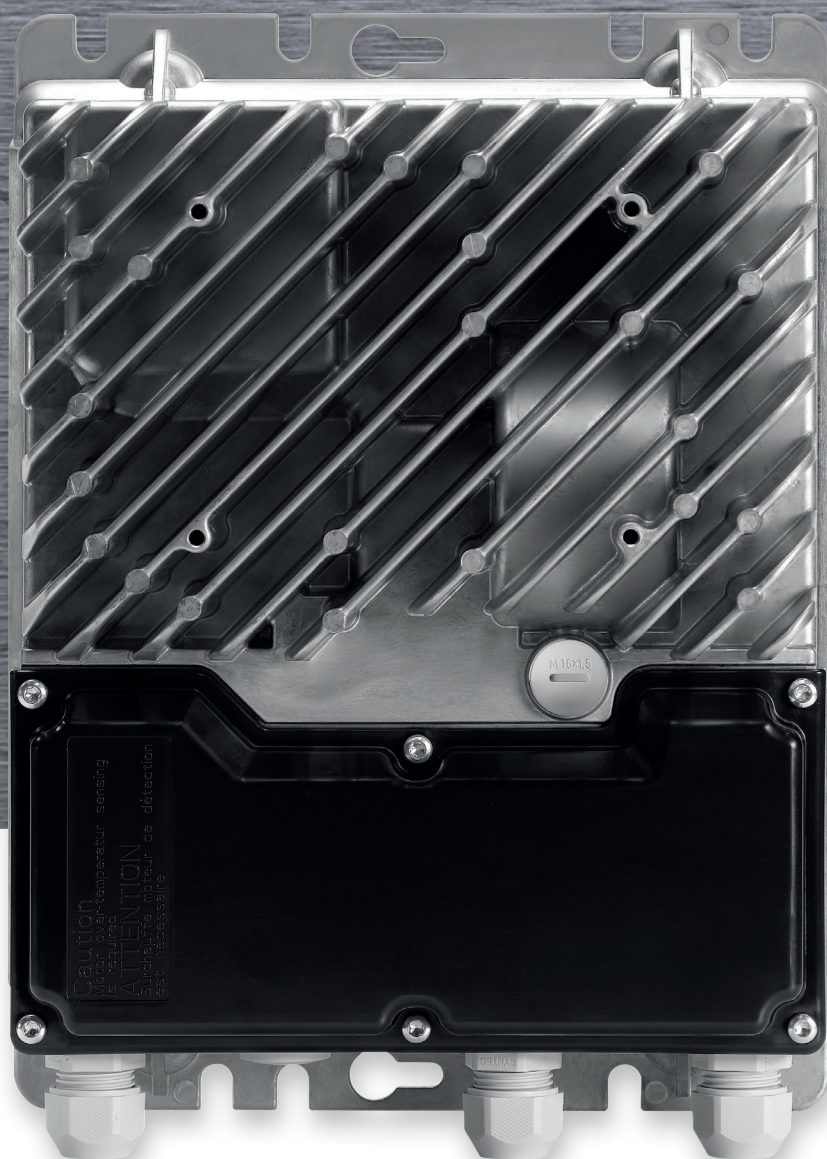

Introduction

This document contains the Modbus addresses and registers which are available in the DV. Modbus can access single addresses or several addresses simultaneously, either reading or writing 1-bit or 16-bit values.

Modbus connection

The DV has four connectors for Modbus communication:

Three RJ12 connectors and one set of spring terminals.


On the strip of spring terminals for control signals (A/D I/O), there are three terminals for RS-485 connection, these are marked "A", "B" and "GND". See figure 1.

These RS-485 spring terminals are internally connected in parallel to the RS-485 pins in the RJ12 connectors marked "A" and "B". The RJ12 connector marked "C" is solely for the connection of external devices.

The three RJ12 connectors are marked "A", "B" and "C":

- "A": RS-485 interface connector, slave, +24VDC voltage supply in connector, for connection of a hand terminal DV-HMI-35T, etc.
- "B": RS-485 interface connector, slave, no voltage supply in connector, for connection of a PC, DV-PC-Tool etc.
- "C": Modbus connector, master, +24VDC voltage supply in connector (V+), for connection of an external device, e.g. PTH/VOC, DV-HMI-35T (in passive mode).

Figure 1

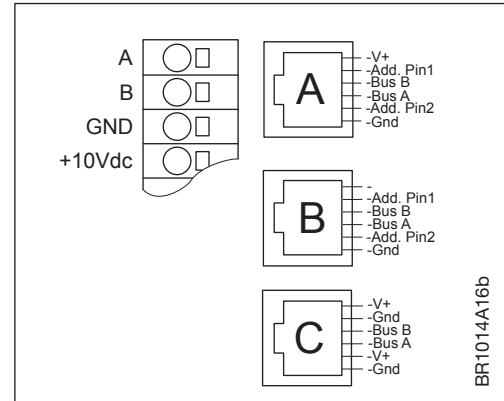

RS-485 interface connection cable

The following can be used for the Modbus communication cable:

- Round communication cable, which should be connected to the DV terminals marked "A" and "B".
- Ribbon/telecom cable, 6-core, unshielded, 30 AWG, 0.066 mm² or similar ribbon cable.



Note


If ribbon/telecom cable is used, RJ12 connectors must be attached to both ends of the cable using a special-purpose tool.



Note

IMPORTANT! The RJ12 connectors must be attached to both ends in such a way that the two connectors follow the same sequence of wire colours in the cable. See figure 2.

Figure 2

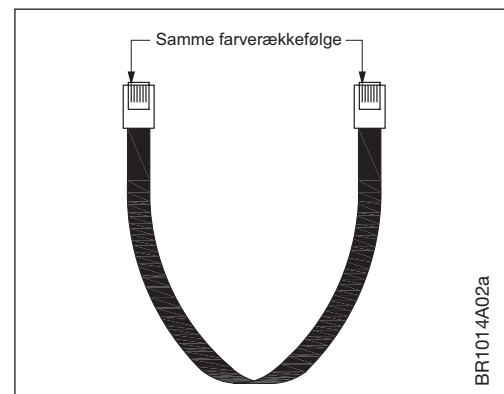

Modbus register types:

Modbus Type	Description	Reference
Coil Status (R/W)	Discrete Output	0x
Input Status (R)	Discrete Input	1x
Input Register (R)	16-bit Input Register	3x
Holding Register (R/W)	16-bit Output Register	4x

R=Read only

R/W = Read / Write









Supported Modbus commands

Function code	Description
1	Read Coil Status
2	Read Input Status
3	Read Holding Registers
4	Read Input Registers
5	Force Single Coil
6	Preset Single Registers
8	Diagnostics. Sub-function 00 Only - Return Query Data (loop back).
15	Force Multiple Coils
16	Preset Multiple Registers

Modbus addressing

Modbus addressing of the DV controls can be accomplished in three different ways.

- Via the addressing pins of connector "A" or "B" (Add. Pin 1 + Add. Pin 2) – see figure 1 for pin location. The addressing pins can be used to assign the DV controls the address range: 0x36 (dec.54), 0x37 (dec.55), 0x38 (dec.56) and 0x39 (dec.57), see table 1.

Pin.no. \ Add.	0X36 (54 dec)	0X37 (55 dec)	0X38 (56 dec)	0X39 (57 dec)
Add.Pin1				
Add.Pin2				

 = No connection between "GND" and Add.Pin1/ Add.Pin2

 = Connection between "GND" and Add.Pin1/ Add.Pin2

- Via Air2 FanIO through connector "B" (see instructions for Air2 FanIO).
- Via the DV-HMI-35T menu (see instructions for DV-HMI-35T).
- Via the DV-PC-Tool by writing to Modbus Holding Register 4x0017 (see instructions for DV-PC-Tool)

Communication parameters

Communication parameters can be set using DV-HMI-35T or via the DV-PC-Tool. For factory settings and setting ranges, see table 2.

	Range	Unit	Factory setting	Alternative factory settings:
Address	0-247	n/a	54 dec.	0 dec.
Baud rate	9.600, 19.200, 38.400, 57.600, 115.200	bps	38.400	115.200
Parity	None, even, odd	n/a	None	Even
Stop bit(s)	1, 2	n/a	1	1
Communication timeout	0-240	Sec.	10	10

n/a=not applicable

The DV supports broadcasting to Modbus id 0

Values in this protocol are to be changed at your own risk.

It is your own responsibility that changes of values and settings, do not cause any overload or damage to the product, motor or fan.

Coil Stat Bits – Available Coil Stat Bits are shown in table 3 below.

Standard Modbus (RTU)

Coil Stat Bits: 23 (R/W)

0x01: Read

0x05: Write Single Coil (NOTE: ON => output value = 0xFF00)

0x0F: Write Multiple Coils

Register	Address	Function	Range	Active state
0x0001	0	Motor ON/OFF	0 - 1	1 = ON
0x0002	1	Reset Alarms	0 - 1	1 = Reset
0x0004	3	FireMode	0 - 1	1 = Active
0x0006	5	Rotation	0 - 1	1 = CW
0x0007	6	Disable I_Ripple protection	0 - 1	1 = Disable
0x0008	7	Control mode	0 - 1	0 = Modbus, 1 = 0-10V
0x0009	8	Use alternate comm. settings	0 - 1	1 = Alternate
0x0010	9	Autodetect communication	0 - 1	1 = Enable
0x0011	10	Analog start signal	0 - 1	1 = Enable
0x0012	11	Invert analog speed input	0 - 1	1 = Invert
0x0013	12	Allow using Field Weakening	0 - 1	1 = Allow field weakening
0x0014	13	Allow using buzzer	0 - 1	1 = Allow buzzer
0x0015	14	Allow using Cooling Fan	0 - 1	1 = Allow Fan
0x0016	15	3 x 230V config	0 - 1	0 = Voltage values from CCF 1 = Fixed values for 3 x 230V
0x0017	16	1V start voltage	0 - 1	0 = Start @ 2V 1 = Start @ 1V
0x0018	17	Very High Switch Frequency	0 - 1	0 = 8 kHz as "HI SF" 1 = 10 kHz as "HI SF"
0x0019	18	Write protect config	0 - 1	0 = Allow change via Modbus 1 = "Lock" configuration
0x0020	19	Clear PowerLog (Wh, kWh, MWh)	0 - 1	1 = Clear Power Log
0x0021	20	Motor output off	0 - 1	1 = Keep motor output off
0x0022	21	Show alarm-type with LED-blink	0 - 1	1 = Use blink to show alarm
0x0023	22	Autodetect Control mode	0 - 1	1 = Analog control with temporary Modbus override
0x0024	23	Set Output Pin (If Output Cfg=5)	0 - 1	0 = Output "Low", 1 = "High"
0x0031	30	Analog Firemode	0 - 1	1 = active
0x0033	32	Set Relay 1 (If IO_Opt1 config=5)	0 - 1	0 = Relay1 Closed, 1 = Open
0x0034	33	Set Relay 2 (If IO_Opt2 config=5)	0 - 1	0 = Relay2 Closed, 1 = Open
0x0035	34	Firmware Locked	0 - 1	1 = Locked
0x0036	35	BACnet Enable	0 - 1	1 = Enabled
0x0037	36	AutoDetect BACnet	0 - 1	1 = Enabled
0x0038	37	Continue at comm. time out	0 - 1	1 = Enable continue speed
0x0039	38	Select zero percent as zero rpm	0 - 1	1 = 0 prc <=> 0 rpm
0x0040	39	Set current time	0 - 1	1 = Enable
0X0041	40	Startup Current reduction method (PMSynRM)	0 - 1	1 = Active
0x0042	41	StandByMotorMonitor	0 - 1	1 = Enable Monitor

Input Stat Bits – Available Input Stat Bits are shown in table 4 below.

Input Stat Bits: 29 (R)

0x02: Read

Register	Address	Function	Range	Active state
1x0001	0	V LO Alarm	0 - 1	1 = Alarm
1x0002	1	V HI Alarm	0 - 1	1 = Alarm
1x0003	2	I HI Alarm (Motor out short)	0 - 1	1 = Alarm
1x0004	3	Temperature High	0 - 1	1 = Warning
1x0005	4	Input Phase Error	0 - 1	1 = Warning
1x0006	5	Rotor Blocked	0 - 1	1 = Alarm
1x0007	6	Current Limit	0 - 1	1 = Warning
1x0008	7	Voltage Limit	0 - 1	1 = Warning
1x0009	8	Rotor Direction	0 - 1	1 = Alarm
1x0010	9	EEPROM Error	0 - 1	1 = Warning
1x0011	10	Internal Stop	0 - 1	1 = Alarm (Stop)
1x0012	11	Earth fault (H5 only)	0 - 1	1 = Alarm
1x0013	12	STO Fault ¹	0 - 1	1 = Alarm
1x0014	13	Motor Phase Error	0 - 1	1 = Alarm
1x0015	14	Communication error MOC	0 - 1	1 = Alarm
1x0016	15	V Ripple	0 - 1	1 = Warning
1x0017	16	Digital Input 1	0 - 1	1 = HI
1x0018	17	Digital Input 2	0 - 1	1 = HI
1x0019	18	Ext. 24V supply overload	0 - 1	1 = Overload
1x0020	19	MOC in bootloader	0 - 1	1 = Alarm
1x0021	20	Digital Input 3 (IOM)	0 - 1	1 = HI*
1x0022	21	Digital Input 4 (IOM)	0 - 1	1 = HI*
1x0023	22	Communication error IOM	0 - 1	1 = Warning*
1x0024	23	Motor Overheat (IOM)	0 - 1	1 = Alarm
1x0025	24	Windmilling	0 - 1	1 = Warning
1x0026	25	Rotation OK	0 - 1	1 = OK
1x0027	26	IO Config mismatch	0 - 1	1 = Warning
1x0028	27	Config write attempt	0 - 1	1 = Detected
1x0029	28	Unsaved UserData	0 - 1	1 = Unsaved
1x0030	29	I_in_limit	0 - 1	1 = Warning
1x0031	30	LowSpeed	0 - 1	1 = Warning
1x0032	31	PreheatActive	0 - 1	1 = Warning
1x0033	32	Undervoltage 17V	0 - 1	1 = Warning
1x0039	38	Digital Input 5 (on AOC)	0 - 1	1 = HI
1x0040	39	STO test failed ¹	0 - 1	1 = Self-test failed
1x0041	40	Cooling fan missing	0 - 1	1 = Warning
1x0042	41	STO test period expired ¹	0 - 1	1 = Warning
1x0043	42	Fan Vibration Level High	0 - 1	1 = Warning
1x0044	43	Controller Vibration Level Critical	0 - 1	1 = Warning

¹: Only if one of the IOM output functions is enabled

APPLICATION NOTE DV Modbus protocol

Input Registers – Available Input Registers are shown in table 5 & 6 below.

Input Registers: 34 (R)

0x04: Read

Register	Address	Function	Range	EC-config (PM)		FC-config (AC)	
				Resolution	Unit	Resolution	Unit
3x0001	0	Drive Type	1000 - 65535	1	-	1	-
3x0002	1	AOC SW version	0 - 65535	0.01	-	0.01	-
3x0003	2	MOC SW version	0 - 65535	0.01	-	0.01	-
3x0004	3	PrcOut	0 - 10000	0.01	%	0.01	%
3x0005	4	RPMOut	0 - 3000	1	RPM	0.01	Hz
3x0006	5	IGBT Temp	-4000 - 12000	0.01	°C	0.01	°C
3x0007	6	V In (RMS)	0 - 500	1	V	1	V
3x0008	7	I Out	0 - 65535	1	mA	1	mA
3x0009	8	Power In (filtered)	0 - 20000	1	W	1	W
3x0010	9	I DC bus	0 - 65535	1	mA	1	mA
3x0011	10	Operation Minutes	0 - 1439	1	Min.	1	Min.
3x0012	11	Operation Day	0 - 9999	1	Day	1	Day
3x0013	12	V Ripple	0 - 500	1	V	1	V
3x0014	13	Config file variant	AA - ZZ	2 ASCII characters		2 ASCII characters	
3x0015	14	Config file version	100 - 32000	0.01	-	0.01	-
3x0016	15	ExternSet	0 - 10000	1	mV	1	mV
3x0017	16	Power Supply	0 - 600	1	V	1	V
3x0019	18	AOC SW variant	-	-	-	-	-
3x0020	19	AOC Boot SW	0 - 65535	0.01	-	0.01	-
3x0021	20	MOC Boot SW	0 - 65535	0.01	-	0.01	-
3x0022	21	Motor Cfg. Var.	0 - 65535	1	-	1	-
3x0023	22	Motor Cfg. Ver.	0 - 65535	0.01	-	0.01	-
3x0024	23	Fan Cfg. Var.	0 - 65535	1	-	1	-
3x0025	24	Fan Cfg. Ver.	0 - 65535	0.01	-	0.01	-
3x0026	25	User Data Var.	0 - 65535	1	-	1	-
3x0027	26	User Data Ver.	0 - 65535	0.01	-	0.01	-
3x0028	27	IOM SW version	0 - 65535	0.01	-	0.01	-
3x0029	28	V DC Bus (Peak)	0 - 800	1	V	1	V
3x0030	29	V Motor (Peak)	0 - 500	1	V	1	V
3x0031	30	Power In (unfiltered)	0 - 20000	1	W	1	W
3x0032	31	Power Consumpt.	0 - 999	1	Wh	1	Wh
3x0033	32	Power Consumpt.	0 - 999	1	kWh	1	kWh
3x0034	33	Power Consumpt.	0 - 65535	1	MWh	1	MWh
3x0039	38	HMI Device status	0 - 65525	-	-	-	-
3x0040	39	HMI SW version	100 - 32000	0.01	-	0.01	-
3x0041	40	IOM Ain2 current	0 - 20000	1	µA	1	µA
3x0042	41	BACnet SW Version	0-65535	0.01	-	0.01	-
3x0049	48	Vin L1 - GND (RMS)	0 - 500	1	V	1	V
3x0050	49	Vin L2 - GND (RMS)	0 - 500	1	V	1	V
3x0051	50	Vin L3 - GND (RMS)	0 - 500	1	V	1	V
3x0052	51	VibrationX_RMS	0 - 4096	1	2 mg	1	2 mg
3x0053	52	VibrationY_RMS	0 - 4096	1	2 mg	1	2 mg
3x0054	53	VibrationZ_RMS	0 - 4096	1	2 mg	1	2 mg
3x0055	54	Vibration_SUM_RMS	0 - 7094	1	2 mg	1	2 mg
3x0056	55	Vibration_SW	0 - 32767	1		1	

APPLICATION NOTE DV Modbus protocol

				EC-config (PM)		FC-config (AC)	
Register	Address	Function	Range	Resolution	Unit	Resolution	Unit
3x0057	56	AOC Thermist.Temp	-4000 - 7500	0.01	°C	0,01	°C
3x0058	57	STO Status ¹	1	IDLE			
			2	IN PROGRESS			
			3	FINISHED			
3x0059	58	CurrentTimeLow1	0 - 65535	1	sec	1	sec
3x0060	60	CurrentTimeHigh1	0 - 32767	65536	sec	65536	sec
3x0061	60	Cooling Fan Speed	0 - 5000	1	RPM	1	RPM
3x0062	61	PCB Temp	-4000 - 12000	0.01	°C	0.01	°C

Input Registers: 18 (R)

0x04: Read

Register	Address	Function	Resolution	Resolution	Unit
3x8193	8192	Production week	0100-5399	1	WWYY
3x8194	8193	Production order number LO	0-9999	1	-
3x8195	8194	Production order number HI	0-9999	10000	-
3x8196	8195	Serial number of batch	0-65535	1	-
3x8197	8196	Product name length + Char0	0-65535	-	2 x ACSII Char
3x8198	8197	Char1 + Char2	0-65535	-	2 x ACSII Char
3x8199	8198	Char3 + Char4	0-65535	-	2 x ACSII Char
3x8200	8199	Char5 + Char6	0-65535	-	2 x ACSII Char
3x8201	8200	Char7 + Char8	0-65535	-	2 x ACSII Char
3x8202	8201	Char9 + Char10	0-65535	-	2 x ACSII Char
3x8203	8202	Char11 + Char12	0-65535	-	2 x ACSII Char
3x8204	8203	Char13 + Char14	0-65535	-	2 x ACSII Char
3x8205	8204	Char15 + Char16	0-65535	-	2 x ACSII Char
3x8206	8205	Char17 + Char18	0-65535	-	2 x Ascii char
3x8207	8206	Char19 + Char20	0-65535	-	2 x ACSII Char
3x8208	8207	Char21 + Char22	0-65535	-	2 x ACSII Char
3x8209	8208	Char23 + Char24	0-65535	-	2 x ACSII Char
3x8210	8209	Char25 + Char26	0-65535	-	2 x ACSII Char
3x8211	8210	Char27 + "NULL"	0-65535	-	2 x ACSII Char

Holding Registers – Available Holding Registers are shown in table 7 below.

Holding Registers: 40 (R/W)

0x03: Read

0x06: Write Single

0x10: Write Multiple

			EC-configuration			FC-configuration		
Register	Address	Function	Range	Resolution	Unit	Range	Resolution	Unit
4x0001	0	Setpoint / PrcSet	0 - 10000	0.01	%	0 - 10000	0.01	%
4x0002	1	Min. RPM	0 - 6000 ¹	1	RPM	0 - 12000	0.01	Hz
4x0003	2	Max. RPM	0 - 6000 ¹	1	RPM	0 - 12000	0.01	Hz
4x0004	3	UpRampTime	15 - 240	1	Sec.	15 - 240	1	Sec.
4x0005	4	DownRampTime	15 - 240	1	Sec.	15 - 240	1	Sec.
4x0008	7	Max I Out	1000 - 65000 ¹	1	mA	1000 - 65000	1	mA

			EC-configuration			FC-configuration		
Register	Address	Function	Range	Resolution	Unit	Range	Resolution	Unit
4x0009	8	Boost I Out	n/a	1	mA	1000 - 65000	1	mA
4x0011	10	SwitchMode	0	AutoSpeed		0	AutoSpeed	
			1	4	kHz	1	4	kHz
			2	8	kHz	2	8	kHz
			3	AutoTemp		3	AutoTemp	
4x0012	11	U minHz	n/a	n/a	n/a	0 - 250	1	V
4x0013	12	Freq Umax	n/a	n/a	n/a	0 - 12000	0.01	Hz
4x0014	13	AutoSF_Change	0 - 10000	0.01	%	0 - 10000	0.01	%
4x0015	14	ExpSet	n/a	n/a	n/a	0 - 200	1	-
4x0016	15	Drive Type	0, 100 - 65000	1	-	1 - 99	1	-

"?"= Value depends on hardware variant

"n/a"= not applicable

Continued table 7			Common for EC (PM) & FC (AC) configuration		
Register	Address	Function	Range / Value	Resolution / Option	Unit
4x0017	16	Modbus ID	1 - 247	1	-
4x0018	17	ModbusResponseDelay	0 - 200	1	ms
4x0020	19	Number of retries	-1 - 100	1	-
4x0022	21	CommTimeout	0 - 240	1	Sec.
4x0023	22	CommRate	0	9600	bps
			1	19200	bps
			2	38400	bps
			3	115200	bps
			4	57600	bps
4x0024	23	Parity	0	None	-
			1	Odd	-
			2	Even	-
4x0025	24	Stop Bits	0	INVALID	-
			1	1	-
			2	2	-
4x0026	25	DigIn1 config	0	Disabled	-
			1	Start/stop	-
			2	AlarmReset	-
			3	MB_IDs_2	-
			4	Invert 0-10V (open = inverted)	-
			5	Rotation	-
			6	Firemode	-
			7	Motor Overheat	-
			8	Invert 0-10V (open = not inverted)	-
			9	Motor output off	-
			10	Modbus Disable	-
			11	FiremodeMax	-
			12	Digital Dual Speed	-
			13	Modbus Enable	-
			14	Modbus ID Offset 1	-
			15	Modbus ID Offset 2	-
			16	Modbus ID Offset 10	-
			17	FiremodeMax with disable	-
			18	Motor Overheat with auto-reset	-
			19	Motor Output Off No Auto-reset	-
			20	Switch Analog/Modbus control	-
			22	Modbus ID Offset 3	-
			23	Modbus ID Offset 4	-

APPLICATION NOTE DV Modbus protocol

Continued table 7			Common for EC (PM) & FC (AC) configuration		
Register	Address	Function	Range / Value	Resolution / Option	Unit
4x0027	26	DigIn2 config	0	Disabled	-
			1	Start/stop	-
			2	AlarmReset	-
			3	MB_IDs_2	-
			4	Invert 0-10V (open = inverted)	-
			5	Rotation	-
			6	Firemode	-
			7	Motor Overheat	-
			8	Invert 0-10V (open = not inverted)	-
			9	Motor output off	-
			10	Modbus Disable	-
			11	FiremodeMax	-
			12	Digital Dual Speed	-
			13	Modbus Enable	-
			14	Modbus ID Offset 1	-
			15	Modbus ID Offset 2	-
			16	Modbus ID Offset 10	-
			17	FiremodeMax with disable	-
			18	Motor Overheat with auto-reset	-
			19	Motor Output Off No Auto-reset	-
			20	Switch Analog/Modbus control	-
			21	Modbus ID Offset 3	-
22	Modbus ID Offset 4	-			
4x0028	27	DigInOut (PI01) config (AOC)	0	Disabled	-
			1	TachoOut	-
			2	RunningStart	-
			3	AlarmOut (NO)	-
			4	RunningSpin	-
			5	Set output status via coil stat 24	-
			6	Single Error Alarm	-
			7	AlarmOut (NC)	-
			8	Tacho Out 5 pulses	-
			9	AlarmOut or Firemode	-
			10	RunningStart NO Firemode	-
			11	RunningSpin NO Firemode	-
			12	External Buzzer	-
			100	Disabled	-
			101	Start/Stop	-
			102	AlarmReset	-
			104	Invert 0-10V (open = inverted)	-
			105	Rotation	-
			106	Firemode	-
			107	Motor overheat	-
			108	Invert 0-10V (open = not inverted)	-
			109	Motor output off	-
			110	Modbus Disable	-
111	FiremodeMax	-			
112	Digital Dual Speed	-			
113	Modbus Enable	-			
114	Modbus ID Offset 1	-			
115	Modbus ID Offset 2	-			
116	Modbus ID Offset 10	-			
117	FiremodeMax with disable	-			
118	Motor Overheat with autoreset	-			
119	Motor Output Off NO autoreset	-			
120	Switch Analog/Modbus control	-			
122	Modbus ID Offset 3	-			
123	Modbus ID Offset 4	-			

APPLICATION NOTE DV Modbus protocol

Continued table 7			Common for EC (PM) & FC (AC) configuration		
Register	Address	Function	Range / Value	Resolution / Option	Unit
4x0029	28	MotorConfigVar.	0 - 65534	1	-
4x0030	29	FanConfigVar.	0 - 65534	1	-
4x0031	30	DigIn3 config (IOM)	0	Disabled	-
			1	Start/stop	-
			2	AlarmReset	-
			4	Invert 0-10V	-
			5	Rotation	-
			6	Firemode	-
			7	Motor overheat	-
			8	Invert 0 - 10V	-
			9	Motor output off	-
			10	Modbus Disable	-
			11	FiremodeMax	-
			12	Digital Dual Speed	-
			13	Modbus Enable	-
			14	Modbus ID Offset 1	-
			15	Modbus ID Offset 2	-
			16	Modbus ID Offset 10	-
			17	FiremodeMax with disable	-
			18	Motor Overheat with auto-reset	-
			19	Motor Output Off No Auto-reset	-
			20	Switch Anlog/Modbus control	-
			22	Modbus ID Offset 3	-
			23	Modbus ID Offset 4	-
4x0032	31	DigIn4 config (IOM)	0	Disabled	-
			1	Start/stop	-
			2	AlarmReset	-
			4	Invert 0-10V (open = inverted)	-
			5	Rotation	-
			6	Firemode	-
			7	Motor overheat	-
			8	Invert 0-10V (open = not inverted)	-
			9	Motor output off	-
			10	Modbus Disable	-
			11	FiremodeMax	-
			12	Digital Dual Speed	-
			13	Modbus Enable	-
			14	Modbus ID Offset 1	-
			15	Modbus ID Offset 2	-
			16	Modbus ID Offset 10	-
			17	FiremodeMax with disable	-
			18	Motor Overheat with auto-reset	-
			19	Motor Output Off No Auto-reset	-
			20	Switch Anlog/Modbus control	-
			22	Modbus ID Offset 3	-
			23	Modbus ID Offset 4	-

APPLICATION NOTE DV Modbus protocol

Continued table 7			Common for EC (PM) & FC (AC) configuration		
Register	Address	Function	Range / Value	Resolution / Option	Unit
4x0033	32	IO_Opt1 config (IOM)	0	Disabled	-
			1	N/A	-
			2	RunningStart	Output
			3	AlarmOut	Output
			4	RunningSpin	Output
			5	Set output status via coil stat 0x0024	Output
			6	Single Error Alarm	Output
			7	Alarm NC	-
			9	AlarmOut or Firemode	-
			10	RunningStart NO Firemode	-
			11	RunningSpin NO Firemode	-
			100	Disabled	-
			101	Start/Stop	Input
			102	AlarmReset	Input
			103	Disabled	Input
			104	Invert 0-10V (open = inverted)	Input
			105	Rotation	Input
			106	Firemode	Input
			107	N/A	-
			108	Invert 0-10V (open = not inverted)	Input
			109	Motor output off	Input
			110	Modbus Disable	-
			111	FiremodeMax	Input
			112	Digital Dual Speed	Input
			113	Modbus Enable	-
			114	Modbus ID Offset 1	-
			115	Modbus ID Offset 2	-
			116	Modbus ID Offset 10	-
			117	FiremodeMax with disable	-
			119	Motor Output Off NO autoreset	-
			120	Switch Analog/Modbus control	-
			122	Modbus ID Offset 3	-
			123	Modbus ID Offset 4	-

APPLICATION NOTE DV Modbus protocol

Continued table 7			Common for EC (PM) & FC (AC) configuration		
Register	Address	Function	Range / Value	Resolution / Option	Unit
4x0034	33	IO_Opt2 config (IOM)	0	Disabled	-
			1	N/A	-
			2	RunningStart	Output
			3	AlarmOut	Output
			4	RunningSpin	Output
			5	Set output status via coil stat 24	Output
			6	Single Error Alarm	Output
			7	Alarm NC	-
			9	AlarmOut or Firemode	-
			10	RunningStart NO Firemode	-
			11	RunningSpin NO Firemode	-
			100	Disabled	-
			101	Start/Stop	Input
			102	AlarmReset	Input
			103	Disabled	Input
			104	Invert 0-10V (open = inverted)	Input
			105	Rotation	Input
			106	Firemode	Input
			107	N/A	-
			108	Invert 0-10V (open = not inverted)	Input
			109	Motor output off	Input
			110	Modbus Disable	-
			111	FiremodeMax	Input
			112	Digital Dual Speed	Input
			113	Modbus Enable	-
			114	Modbus ID Offset 1	-
			115	Modbus ID Offset 2	-
			116	Modbus ID Offset 10	-
			117	FiremodeMax with disable	-
			119	Motor Output Off NO autoreset	-
			120	Switch Analog/Modbus control	-
			122	Modbus ID Offset 3	
			123	Modbus ID Offset 4	
4x0035	34	AnalogOut1 config (IOM)	0	Disabled	-
			1	ActSpeed	-
			2	ActExternSet	-
4x0036	35	Thermistor config (IOM)	0	Disabled	-
			1	Motor Overheat PTC	-
4x0037	36	AnalogIn2 config (IOM)	0	Disabled	-
			1	SpeedControl 4 - 20 mA	-
4x0038	37	Thermistor threshold	1 - 65000	1	Ω
4x0039	38	Max Windmilling Time	0 - 65000	1	Sec
4x0040	39	Alarm Relay Mask 1	0 - 0xFFFF1	1	-
4x0041	40	MinVoltage (U1)	500 - MaxVoltage	1	mV
4x0042	41	MaxVoltage (U2)	MinVoltage - 9500	1	mV
4x0043	42	LowSpeed (S0)	MinRPM - MaxRPM	1	RPM
4x0044	43	Non-volatile setpoint	0 - 10000	0.01	%
4x0045	44	Low Speed Limit	0 - Max_rpm	1	RPM
4x0046	45	Temporary UDF Variant 2	0 - 65000	1	-
4x0047	46	Temporary UDF Version 2	0 - 65000	1	-

APPLICATION NOTE DV Modbus protocol

Continued table 7			Common for EC (PM) & FC (AC) configuration		
Register	Address	Function	Range / Value	Resolution / Option	Unit
4x0048	47	LED Warning Config 3	0 – 0xFFFF3	1	-
	Bit 0	Temperature High	0 - 1	1	-
	Bit 1	Current limit	0 - 1	1	-
	Bit 2	Voltage limit	0 - 1	1	-
	Bit 3	Cooling fan missing	0 - 1	1	-
	Bit 4	Voltage ripple warning	0 - 1	1	-
	Bit 5	Windmilling	0 - 1	1	-
	Bit 6	24V overload	0 - 1	1	-
	Bit 7	IO configuration mismatch	0 - 1	1	-
	Bit 8	EEPROM Error	0 - 1	1	-
	Bit 9	IOM communication	0 - 1	1	-
	Bit 10	Low speed limit	0 - 1	1	-
	Bit 11	Input current limit	0 - 1	1	-
	Bit 12	Preheat active	0 - 1	1	-
	Bit 13	Input phase error	0 - 1	1	-
	Bit 14	STO test period expired	0 - 1	1	-
Bit 15	Vibration level high	0 - 1	1	-	
4x0049	48	SpeedBypass Low 1 or Dual Speed 1	MinRPM – MaxRPM	1	RPM
4x0050	49	SpeedBypass High 1 or Dual Speed 2	MinRPM – MaxRPM	1	RPM
4x0051	50	SpeedBypass Low 2	MinRPM – MaxRPM	1	RPM
4x0052	51	SpeedBypass High 2	MinRPM – MaxRPM	1	RPM
4x0053	52	SpeedBypass Low 3 or Firemode Max speed	MinRPM – MaxRPM	1	RPM
4x0054	53	SpeedBypass High 3	MinRPM – MaxRPM	1	RPM
3x0055	54	PrcHoldingTorque	-1 - 500	0.1	%
4x0057	56	BacnetMAC	0-127		-
4x0058	57	BacnetMaxMaster	1-127		-
4x0059	58	BacnetDeviceObjectInstance_Low	0- 4194302		-
4x0060	59	BacnetDeviceObjectInstance_High	(2 ²² -2)		-
4x0061	60	PowerAdjust	-100 - +100	0.1	%
4x0062	61	StartSpeedBoostTime	0 – 240	1	s
4x0063	62	Analog in HW Config (AOC)	0	Disabled	
			1	0 – 10V	
			2	4-20mA	
			3	Thermistor PTC1k	
			4	Thermistor NTC10k	
			5	Thermistor NTC47k	
			6	Thermistor NTC100k	
			7	Thermistor PT100	
4x0064	63	Analog In Function (AOC)	0	Disabled	
			1	Speed Control	
			2	Temperature measure	
4x0065	64	Analog Out Config (AOC)	0	Disabled (+10V)	
			1	+10V	
			2	+24V	
4x0066	65	DIO PullUp	0	Disabled	
			1	+10V	
			2	+24V	
4x0067	66	SetTimeOffsetLow	0 – 65535	1	s
4x0068	67	SetTimeOffsetHigh	0 – 32767	65536	s

"TBD"= To be done – for future use

¹ = Actual max limit set by CCF, MCF and FCF